



Installation Guide for 2018-24 Jeep Wrangler JL LED Tail Lights (Vehicle equipped with Stock halogen without BSM sensor)

ALPHAREX specializes in designing and producing superior and uniquely stylish aftermarket automotive performance lighting with unrivalled innovative technology. This installation guide takes you through the step-by-step process of installing your new **ALPHAREX TAIL LIGHTS** for your 2018-24 Jeep Wrangler JL
DO NOT USE DIELECTRIC GREASE!



Table of Contents



PART I REMOVE TAIL LIGHTS

- **INSTALLATION TOOLS**
- **STEP 1.** Remove the screws
- **STEP 2.** Remove the tail lights
- **STEP 3.** Transfer the bracket

PART II INSTALL ALPHAREX TAIL LIGHTS


- **STEP 1.** Install the tail lights
- **STEP 2.** Complete installation

Disclaimer: This installation article is a tutorial guide. By reading this article, you agree it is for reference only and AlphaRex USA and its distributors make no guarantee on the finished results. Under no circumstances whatsoever shall AlphaRex USA nor its distributors be liable for any damage, misuse or personal injuries. If you do not fully understand the installation procedure, it is highly recommended that you seek help from professional mechanics to do the installation.


PART I REMOVE TAIL LIGHTS

INSTALLATION TOOLS

PREPARE THESE TOOLS FOR INSTALLATION



Metal
Panel
Popper



Power Tool



1/4 Ratchet



1/4 Extension

10mm



Socket

STEP 1. REMOVE THE SCREWS

Whenever working on your vehicle, always make sure your vehicle is OFF and parked.



Start by opening the truck and the rear window.



Take off the plastic access cover from the rear trim interior.



Unscrew the 10mm plastic screw securing the tail light. Repeat the same steps for the other side.



STEP 2. REMOVE THE TAIL LIGHTS

Gently pull the tail light assembly outward towards you to disengage it from its position.




Take out the tail light by disconnecting the plug sockets. Repeat the same steps for the other side of the tail light.




STEP 3. TRANSFER THE BRACKET

Transfer the original equipment (OE) factory bracket to the Alpharex tail light assembly.

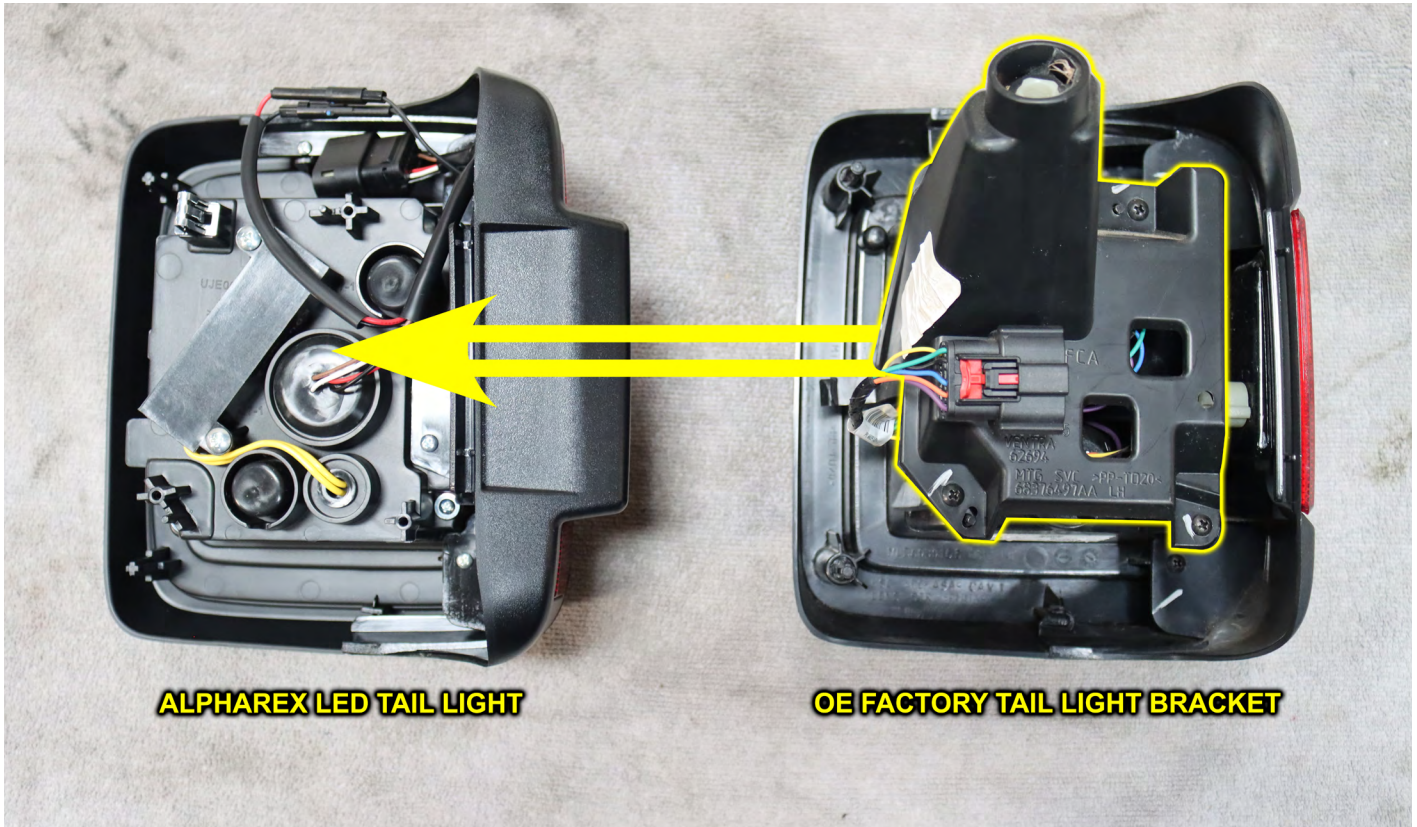

Loosen the four screws and disconnect the connector to remove the bracket.



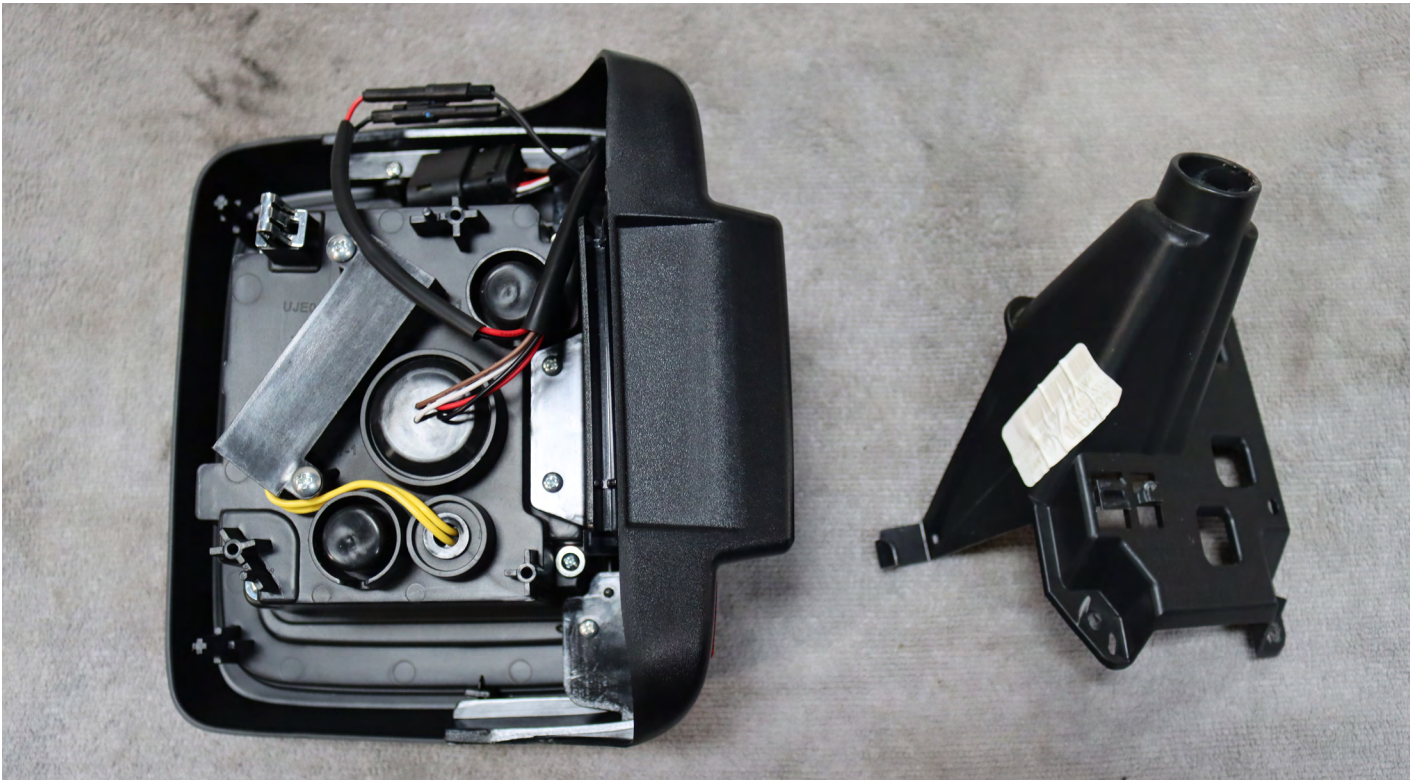

Install the bracket onto the new Alpharex tail light assembly. Repeat the same steps for the other side of the tail light assembly.



PART II INSTALL ALPHAREX TAIL LIGHTS



STEP 1. INSTALL THE TAIL LIGHTS

Connect the light sockets into the tail light assembly.

DO NOT USE DIELECTRIC GREASE!



To complete the installation, reverse the procedure used for removal.
Repeat the same steps for the other side of the tail light.



STEP 2. COMPLETE INSTALLATION

Congratulations! You have completed the installation for ALPHAREX 18-24 Jeep Wrangler JL LED TAIL LIGHTS.

